

TITAN 2500 AHC

Overedging carpets for car, plane and boat.



APPLICATIONS :

This model allows to sew external or internal curves of a small diameter. The machine is always fitted with a pneumatic footlift and tension opener to make it easier to manipulate the carpet while sewing.

OPTIONS STRONGLY ADVISED

- RPE/2500 : external density adjuster to change n° of stitches.
- TA/2500 : teflon coated upper table.
- FH/2500 : oil filter.
- SET 30566 : tape binder.
- MEM/2500 : electronic motor.
- NCV/2500 : to cool the needle.
- BW/2500 : blower for high pile carpets

REMARK

This completely new and revised model has many advantages compared to the previous TITAN 2500Ag model.

- It can sew carpets with smaller inside radius.
- Thicker qualities of carpets.
- Better visibility for the operator.
- Easier to operate with new pneumatic foot.
- Easier threading and improved sewing quality.
- Combined with electronic motor (MEM) it can perfectly sew square corners.

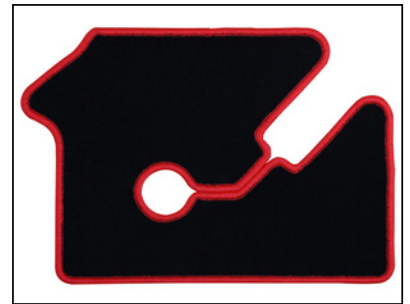
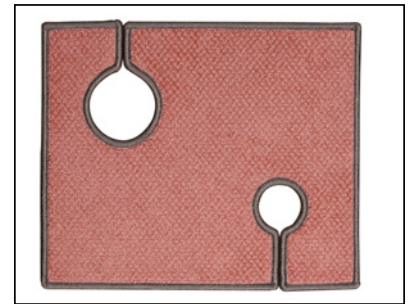



Fig.1 - 2: Standard: 2 threads.



Fig. 3: Model DK2500AHC/3: 3 threads.


ALWAYS INCLUDED :

- Carburedated feeddog
- Pneumatic footlift CP/2500.

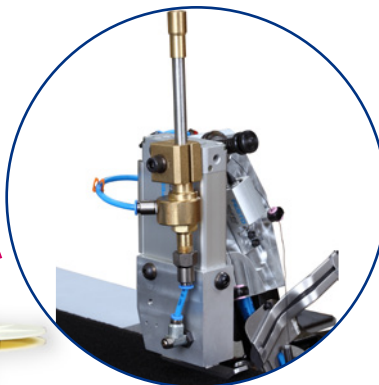

SPECIFICATIONS

- Speed : 2800 stitches/min.
- Stitch width : 10 mm-12 mm.
- Density of stitches : 1 to 10 stitches/cm.
- Threads : all types of threads.

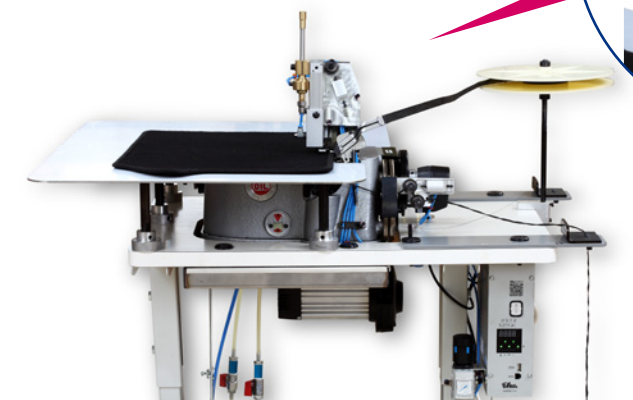

SPEED	STITCH LENGTH	STITCH WIDTH	THICKNESS	FABRIC FEED	NEEDLES
2800 _{spm}	1-10	10	10 _{mm}	BOTTOM	1