























HM866 - The technical data

			Material						
	[mm] max.	[min-1] max.						C [mm] D [mm]	C [mm] D [mm]
HM866-190180	10	800	MS / S	●	●	●	●	420 225	
HM866-190181	10	800	MS / S	●	●	●	●	420 225	
HM866-190581	10	800	MS / S	●	●	●	●	420 225	
HM866-190180-100	10	800	MS / S	●	●	●	●		1.000 225
HM866-190181-100	10	800	MS / S	●	●	●	●		1.000 225
HM866-190581-100	10	800	MS / S	●	●	●	●		1.000 225

											
	A [mm] max. B [mm] max.			[mm] max.							
HM866-190180	19 / 26*	30	●	●	12	○	●	●	15	●	○
HM866-190181	19 / 26*	30	●	●	12	●	●	●	15	●	○
HM866-190581	19 / 26*	30	●	●	12	●	●	●	15	●	○
HM866-190180-100	19 / 26*	30	●	●	12	○	●	●	15	●	○
HM866-190181-100	19 / 26*	30	●	●	12	●	●	●	15	●	○
HM866-190581-100	19 / 26*	30	●	●	12	●	●	●	15	●	○

												
							Program control, operating panel OP1000	[NL] [bar]			[Nm] max.	max.
HM866-190180	○	●	●	○	●	●	●	0,7 6	794 / 1000H	120 - 300	5/3	0,8 - 1,6
HM866-190181	○	●	●	○	●	●	●	0,7 6	794 / 1000H	120 - 300	5/3	0,8 - 1,6
HM866-190581	●	●	●	○	●	●	●	0,7 6	794 / 1000H	120 - 300	5/3	0,8 - 1,6
HM866-190180-100	○	●	●	○	●	●	●	0,7 6	794 / 1000H	120 - 300	5/3	0,8 - 1,6
HM866-190181-100	○	●	●	○	●	●	●	0,7 6	794 / 1000H	120 - 300	5/3	0,8 - 1,6
HM866-190581-100	●	●	●	○	●	●	●	0,7 6	794 / 1000H	120 - 300	5/3	0,8 - 1,6


● = Standard equipment, ○ = Optional equipment, MS = Medium weight to heavy weight material
S = Heavy weight material, * = 19 mm max. with needle system 794; 26 mm max. with needle system 1000H

	Nominal voltage	Rated power	Weight, sewing head	Dimensions (Length, Width, Height)		
	[V], [Hz]	[W] max.	[kg]	[mm] max.		
HM866-190180	1x230V, 50/60 Hz	375	90	1.200	600	1.700
HM866-190181	1x230V, 50/60 Hz	375	90	1.200	600	1.700
HM866-190581	1x230V, 50/60 Hz	375	90	1.200	600	1.700
HM866-190180-100	1x230V, 50/60 Hz	375	ca. / approx. 145	1.900	600	1.700
HM866-190181-100	1x230V, 50/60 Hz	375	ca. / approx. 145	1.900	600	1.700
HM866-190581-100	1x230V, 50/60 Hz	375	ca. / approx. 145	1.900	600	1.700

industrial sewing applications

HM866

Heavy duty programmable zigzag machine with top feed

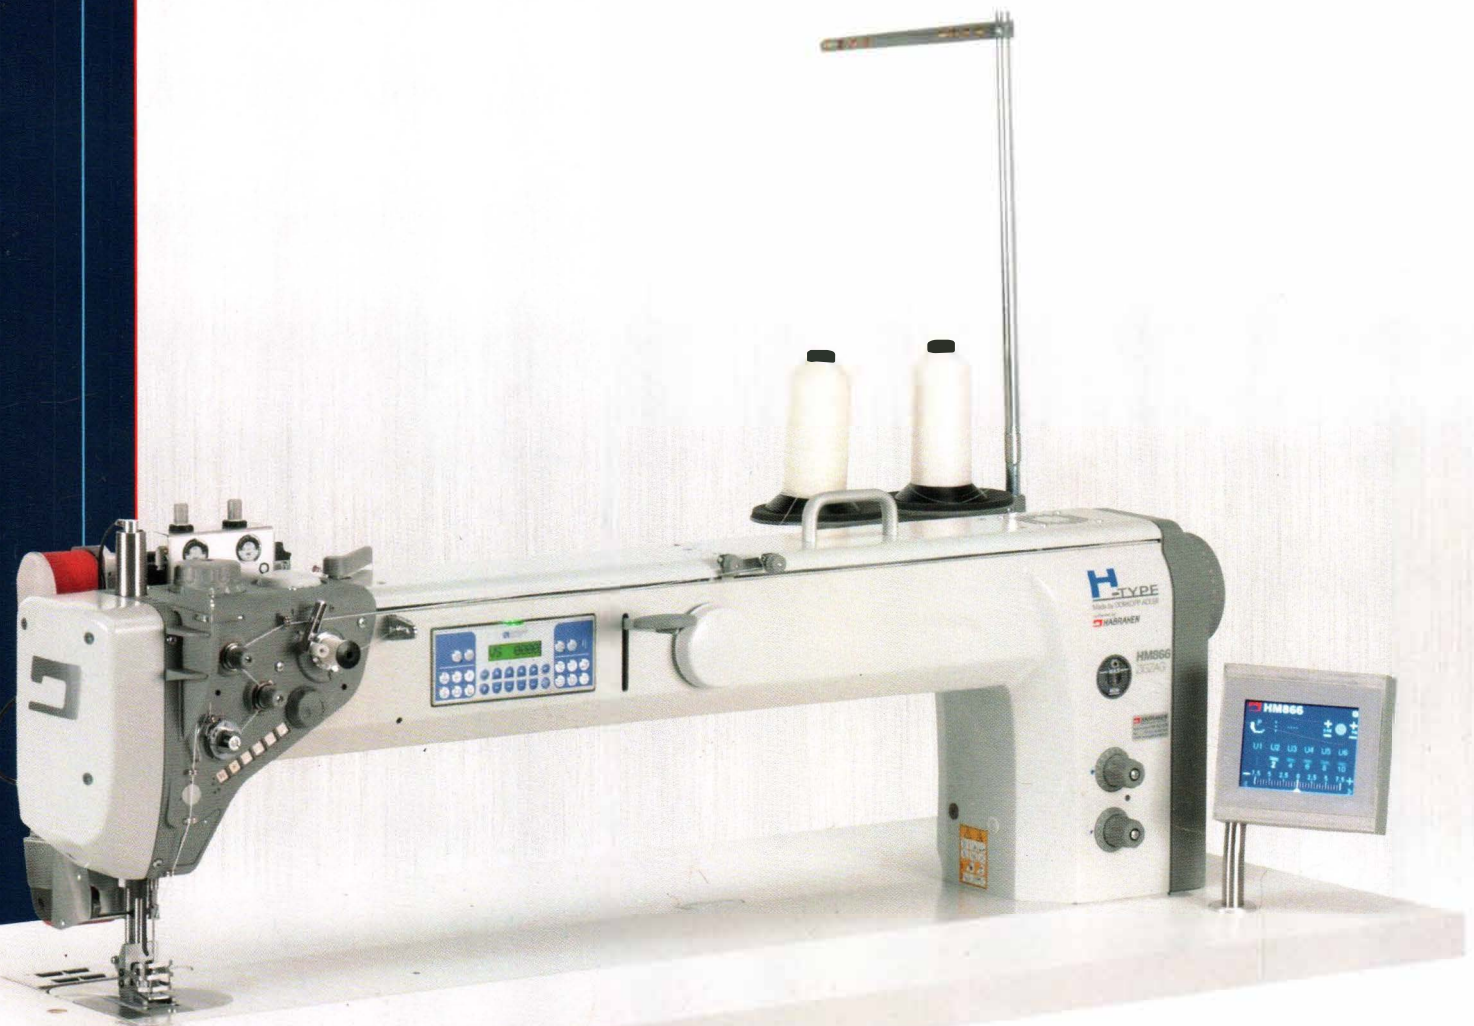

Industrial Sewing Applications