

Specification

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C5-02×250/AT(Pocket Binding)	14#	2	4	5	—	4	0.7-2	3.5	7000	525*360*510	33/44
C5-3-02/233/KS(Plain Seaming)	11#	1	3	—	4	4	0.7-2	5	7000	525*360*510	33/44
C5-3-32R2/223/KS(Condense Seaming)	9#	1	3	—	1.5	4	0.7-2	5	7000	525*360*510	33/44
C5-WF-3-02/213/AT(Nonwovens)	14#	1	3	—	4	8.5	—	5.5	7000	525*360*510	33/44
C5-4-M03/333/KS(Plain Seaming)	11#	2	4	2	4	4.6	0.7-2	5.5	7000	525*360*510	33/44
C5-4-M03/333/H/M/KS(Heavy Duty)	11#	2	4	2	4	4.6	0.7-2	6	7000	525*360*510	33/44
C5-4-83/323/BK(Towel Ending)	11#	2	4	2	4	4.6	0.7-2	3.5	7000	525*360*510	33/44
C5-MJ-4-53/233/AT(Strip Attaching)	11#	2	4	2	4	4	0.7-2	5	7000	525*360*510	33/44
C5-5-53/233/AT(5X5 Stitch)	14#	2	5	3	5	4	0.7-2	5	7000	525*360*510	33/44
C5-5-03/233/KH(3x4 Stitch)	14#	2	5	5	5	4	0.7-2	5	7000	525*360*510	33/44
C5-5-03/333/KH(Extra Heavy)	14#	2	5	3	4	4	0.7-2	5	7000	525*360*510	33/44
C5-5-A04/435/AT(Demin)	19#	2	5	5	6	5	0.8-1.5	7	7000	525*360*510	33/44
C5-5-M04/435/AT(Plain Seaming)	19#	2	5	5	6	5	0.8-1.5	7	7000	525*360*510	33/44
C5-6-03/333/AT(Demin)	11#	3	6	3x2	4	4	0.7-2	5	7000	525*360*510	33/44
C5-6-M04/435/AT(Especially For Denim)	19#	3	6	5x2.5	3.5	5	0.8-1.5	7	7000	525*360*510	33/44

Note:KS:Vertical suction device; KH:Horizontal suction device; AT:Pneumatic cutter trimming; H/M: Wide range for heavy duty; Optional C5W(Semi-dry)




Thread Cleanness Pneumatic
High Speed Automatic Overlock Machine



C5(Pneumatic)

C5(Pneumatic)

Thread Cleanness Pneumatic High Speed Automatic Overlock Machine
Short remaining thread, Clean sewing, Stable and durable

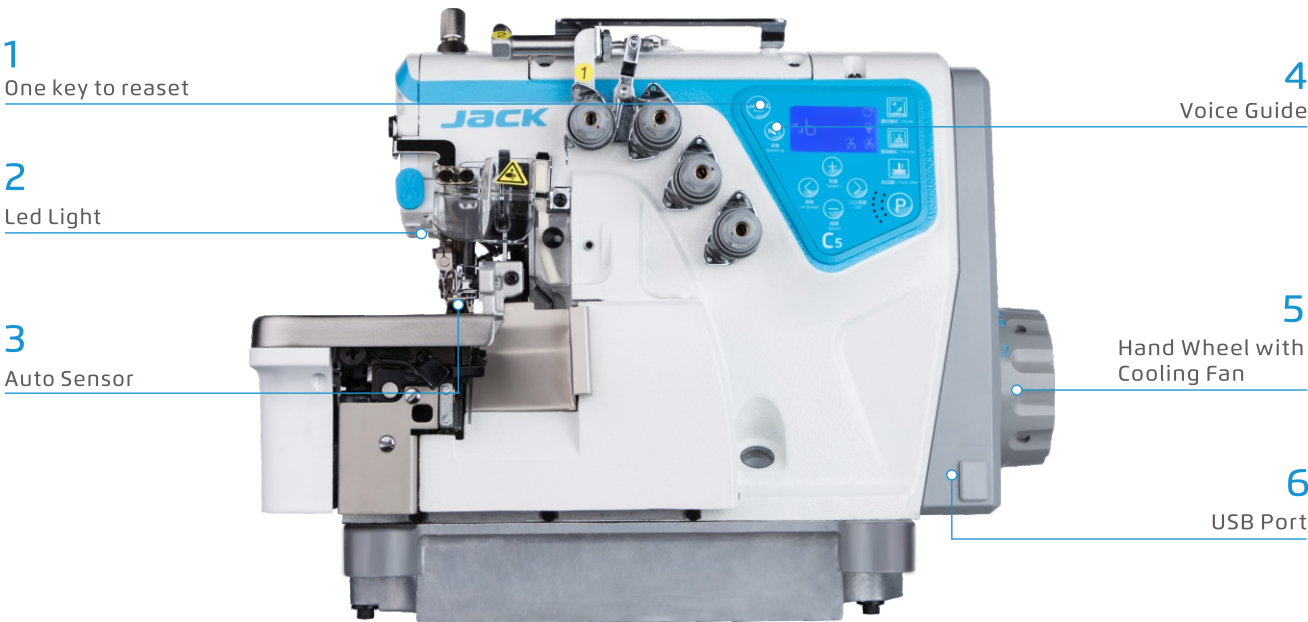


Voice guide, voice alarm easy to operate




1 Thread Cleanness

The front sunction for rags, the back suction for thread remaining.Keep clean sewing

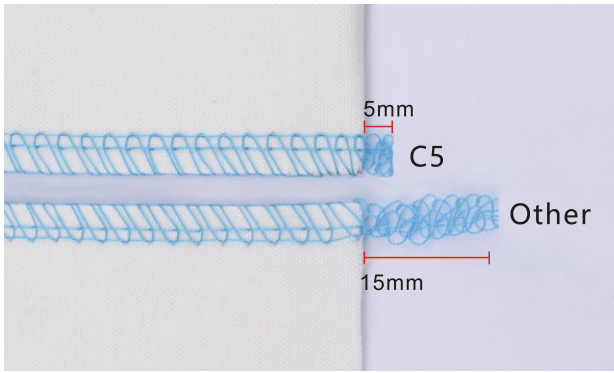


2 Short remaining thread, no need extra trimming

Auto thread trimming can control the remaining thread to be within 5mm, no need extra trimming

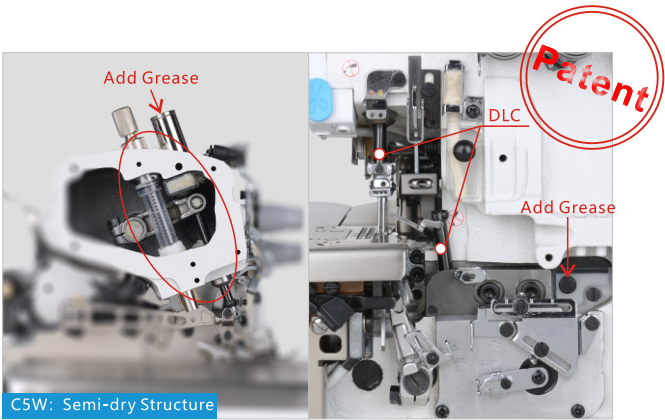

3 Clean Sewing

Unique grease lubrication,Using diamond needle bar and slider,Effectively avoid oil pollution and keep cleaning

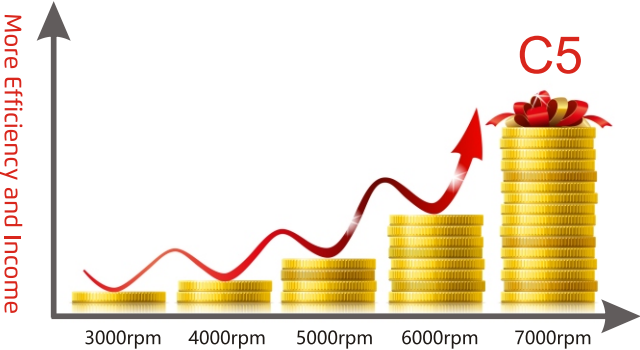

5 High Speed; More Efficiency and Income

Max speed can reach to 7000rpm.The efficiency of C5 is 35%-100% higher than normal machine. For example, worker salary=4000RMB/month*(1+35%)=5400RMB. According to the anlysis, the income percentage of workers and boss is 4:6, then the boss monthly revenue increase 2100RMB per month.



7 One Key to Reset, Trouble Free

Users can reset to their parameters or factory parameters according to their need. Do not worry about the mistake operation.




4 Stable and Durable

The application of new material and process ensures the machine durable and long life when running at high speed



6 Voice Guide, Easy to Learn and Operate

Users voice guide; Automatic voice broadcast solution;It is easy to learn and operate.

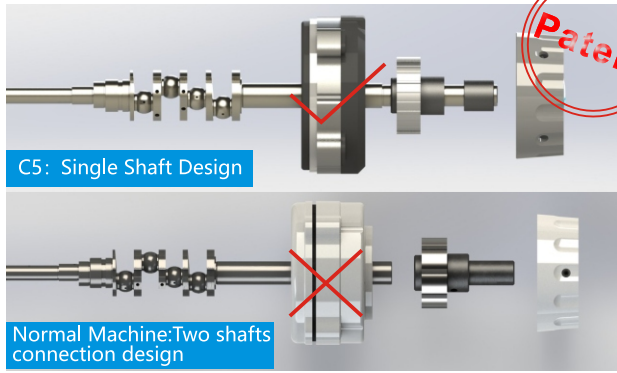

8 One main shaft, stable and fast

Reduce the machine torque, making the sewing fast , stable and durable