











Air-Supported Threading! Create the Look of a Professional Finish!

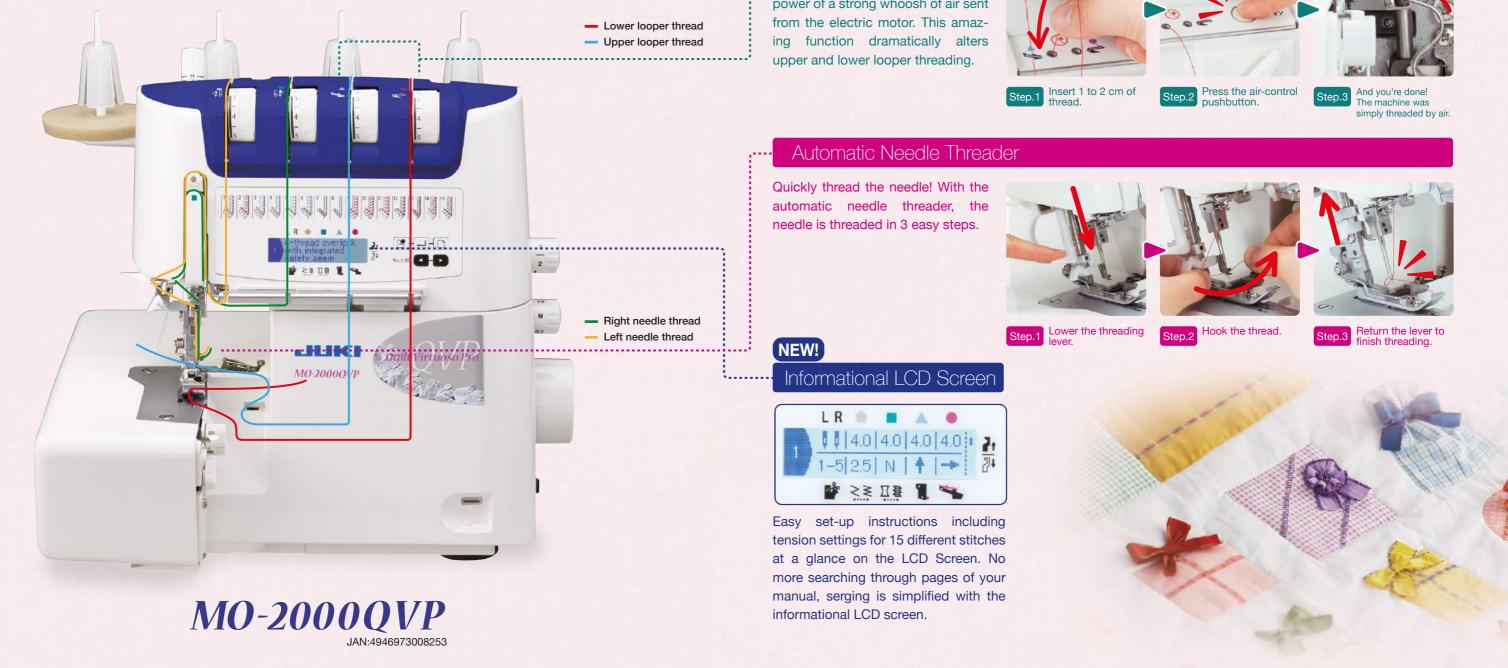



Adjustable Differential Feed

Even with easily stretched fabrics such as knits and georgette, create beautifully sewn finishes by adjusting the differential feed. Adjustments can even be made while sewing.



Beautiful Sharp Curve

The distance between the needle and knife is 9.95mm(conventional model:15.5mm), allowing you to sew beautiful inside curves.



Upper Looper Converter 2-/3-Thread Conversion

Switch to 2-thread sewing simply by pushing the 2-/3-thread changeover attachment to the left, making this operation even easier



Wide Throat Area The height of the throat is 72.4mm. Due to this height, the usability of the work space improved infinitely.

Quiet Operation The sound reducing design minimizes the operating noise and the unit sews with less vibration.



LED Sewing Light

The needle area is brightly illuminated. The long-life, energy-effcient and eco-friendly light will not heat up, even after a long period of use.

Convenient Threading with the Easy Threader

Using the new easy threader feature, easily thread the machine from the threading hole to the looper with the power of a strong whoosh of air sent










Waste Collector

Provided as a standard accessory, the waste collector catches cut-off fabric and is useful for keeping the area tidy

Other Useful Features


- Automatic rolled hemming
- Adjustable presser foot pressure
- Option to deactivate upper knife
- Cutting width adjusting dial
- Safety feature preventing operation when the presser foot is upper position or the cover is open
- Thread trimming blade for easy thread cutting.

Various Stitch Patterns To Unleash Your Creativity!



4-Thread Overlock

Uses 2 needles and 4 threads to securely sew together knitted fabrics.



3-Thread Overlock

This basic stitch of overlock machines prevents fabric from fraying.



3-Thread Flatlock

Use this stitch as an accent on clothes, interior items and accessories.



3-Thread Narrow Overlock

The fabric edge is rolled, then sewn with very narrow overlocking.



3-Thread Rolled Hem The Fabric edge is rolled, then

covered with thread.



Frill 3-Thread Rolled Hem With Diff. Feed

Uses 3-thread rolled hemming and the differential feed on stretch fabrics to create richly designed articles.

MO-2000QVP Standard Specifications



2-Thread Overlock Simply sew fabric edges with 2 threads to prevent fraying.

Optional attachments



Number of Needles		1/2 Needles
Needle		SCHMETZ 130/705 H or JLx2
Number of Threads		2/3/4 Threads
Differential Feed		0.7-2.0 Ratio
Sewing Speed		Maximum 1,500 spm
Easy Threader		Х
Light		LED
Presser Foot Lift		5mm (Max: 8mm)
Stitch Length		1-4mm
Overlocking Width	Left Needle	5-9mm
	Right Needle	3-7mm
	Rolled Hem	2mm
Accessories		Needle set 130/705H(SCHMETZ)/ Screwdriver / Tweezers / Brush/needle inserter / Electronic foot control / Nets / Spool caps / Looper threader / Accessory bag / Dust cover / Waste collector / Oiler / Instruction manual / Operation support DVD
Dimensions		330 (W) x 280 (D) x 310 (H) mm
Weight		9.0 kg



Juki Quality!

JUKI CENTRAL EUROPE Sp. z o.o. ul. Poleczki 21, 02-822 Warsaw, Poland Tel.: +48 22 545 04 00 / Fax: +48 22 545 04 11

www.jukieurope.com / www.facebook.com/JukiSewlt / e-mail: juki@juki.pl